





ST-100 MODELS

ST-100 Series models are up to 1.0 cubic yard mounted or pull-type topdressers with galvanized hoppers. They offer a choice of tractor hydraulics or 13-hp Honda engine-driven hydraulics, with standard or deluxe controls. Their wide, 20" conveyor belt moves different kinds of material smoothly through a large, 7" X 20" metering gate. There is a choice of fixed or tilt spinners. Standard turf tires are 26.5 X 14-12 NHS for maximum flotation.

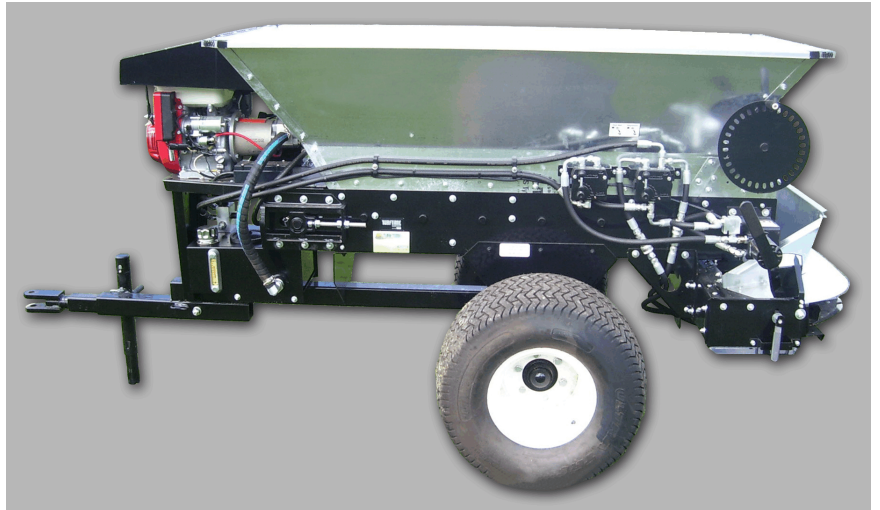

NEED SOMETHING BIGGER?

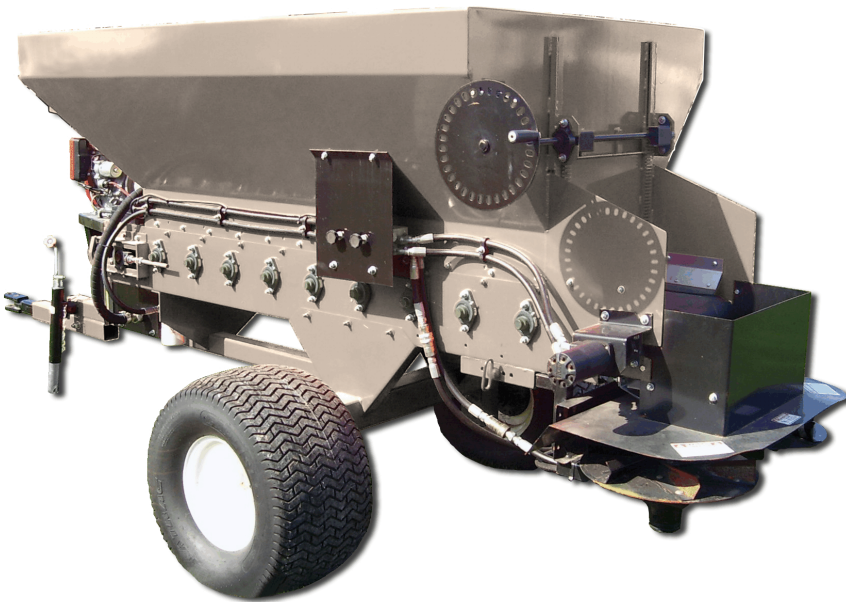

If the ST-100 isn't large enough to handle your needs, Models 3500, 5000, and 6500 large capacity topdressers offer capacities of 3.5, 5.0 or 6.5 cubic yards! They can spread dry or wet material of all kinds, many with more than 40' feet wide spread pattern. These topdressers have a 31" wide, crescent-style conveyor belt and a 15" X 31" metering gate opening for quick unloading without bridging. These units will also offer "pin-on" attachments. Their large capacity drastically cuts labor cost and reduces trips. Large, 16.5L X 16.1 flotation tires are standard for low ground pressure and good stability.




Earth & Turf Products, LLC
America's Compact Topdresser Company

112 South Railroad Ave. • New Holland, PA • 888 693 2638


LANCO MODEL SPECIFICATIONS




The Model 3500 spreading wet sand 480 inches wide in a smooth, even pattern.

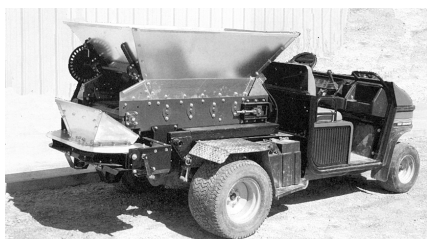

The Model ST100 mounted version for Cushman, John Deere and Toro vehicles.

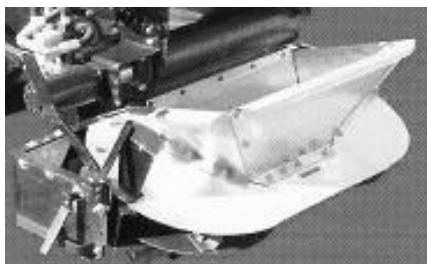

Tilt Spinners

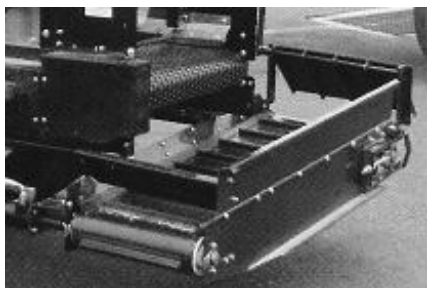

Optional Cross Conveyer

	<i>MODEL ST100</i>	<i>MODEL 3500</i>	<i>MODEL 5000</i>	<i>MODEL 6500</i>
LOAD CAPACITY	up to 1 cu. yd. .765 m ³	3.5 cu. yd. 2.7 m ³	5 cu. yd. 3.8 m ³	6.5 cu. yd. 5 m ³
MAX. LOAD WEIGHT	3,000 lbs. 1,361 kg	9,500 lbs. 4,309 kg	13,500 lbs. 6,124 kg	17,550 lbs. 7,961 kg
HOPPER WIDTH	Top 39 in., Bot. 21 in. Top 99 cm, Bot. 53.3 cm		Top 72 in., Bot. 32 in. Top 182.9 cm, Bot. 81.3 cm	
HOPPER LENGTH	Top 50 in., Bot. 37 in. Top 126.5 cm, Bot. 94 cm	72 in. 182.9 cm	96 in. 243.8 cm	120 in. 304.8 cm
OVERALL HEIGHT	53 in. 134.6 cm		80 in. (With Std tires) 203.2 cm	
OVERALL WIDTH	61 in. 154.9 cm		80 in. (With Std tires) 203.2 cm	
OVERALL LENGTH	119 in. 301.8 cm	156 in. 396.2 cm	180 in. 457.2 cm	204 in. 518.2 cm
SPREAD WIDTH	Up to 360 in. (915 cm)		Up to 480 in. (1,219 cm)	
SPREAD SYSTEM			Twin Spinners	
EMPTY WEIGHT W/TIRES	1,200 lbs. 544.3 kg	1,590 lbs. 721.2 kg	1,750 lbs. 793.8 kg	1,975 lbs. 895.9 kg
TIRE SIZES	25.6 x 14-12 NHS Turf	(Std) 16.5 x 16.1 Flotation, (Opt) 21.5 x 16.1 Flotation, (Opt) 41/18LL-22.5 Turf Special		
PROPULSION	Pull-Type or Mounted	Pull-Type		
COMPONENT DRIVE	(Std) Tractor/Vehicle Hydraulics, (Opt) PTO Driven Hydraulics (Opt) Engine Driven Hydraulics	(Std) Tractor/Vehicle Hydraulics, (Opt) PTO Driven Hydraulics (Opt) Engine Driven Hydraulics	(Std) PTO Driven Hydraulics (Opt) Engine Driven Hydraulics	
TOW VEHICLE MINIMUM POWER	20 hp (15 kW)	45 hp (33.6 kW)	60 hp (45 kW)	75 hp (56 kW)
CONSTRUCTION	Galvanized, bolted Hopper	11 Gauge Welded Steel; Painted Hopper		
CONTROLS	(Std) Independent Conveyer & Spinner Shut Off, (Opt) Vehicle-Mounted Control Panel with Electronic spinner & Conveyer Adjustment	(Std) 2 Flow Control Valves to Adjust Apron & Attachment Speeds, (Opt) Tractor-Mounted Controls		
METERING GATE	20 in. X 7 in. (50.8 cm x 17.8 cm) , Manual adjustment 0 - 7 in. (0 - 17.8 cm)	31 in. X 15 in. (78.7 cm x 38.1 cm) , Manual adjustment 0 - 15 in. (0 - 38.1 cm)		
APRON BELT	20 in. (50.8 cm) Smooth	Crescent-Style, with Center Tracking Groove		
HITCH	Heavy-Duty Clevis	Heavy-Duty Swivel Clevis		
TOPDRESSING SPEED		0 - 10 mph 0 - 16 kph		
OPTIONS		Cross Conveyer		



112 South Railroad Ave • New Holland, PA • 888 693 2638