



www.go-teamstorm.com

**METAL
PLESSIS** INC.

**TEAM
STORM**


MPST06 Edition



**METAL
PLESSIS** INC.

**TEAM
STORM**

SNOW PLOW

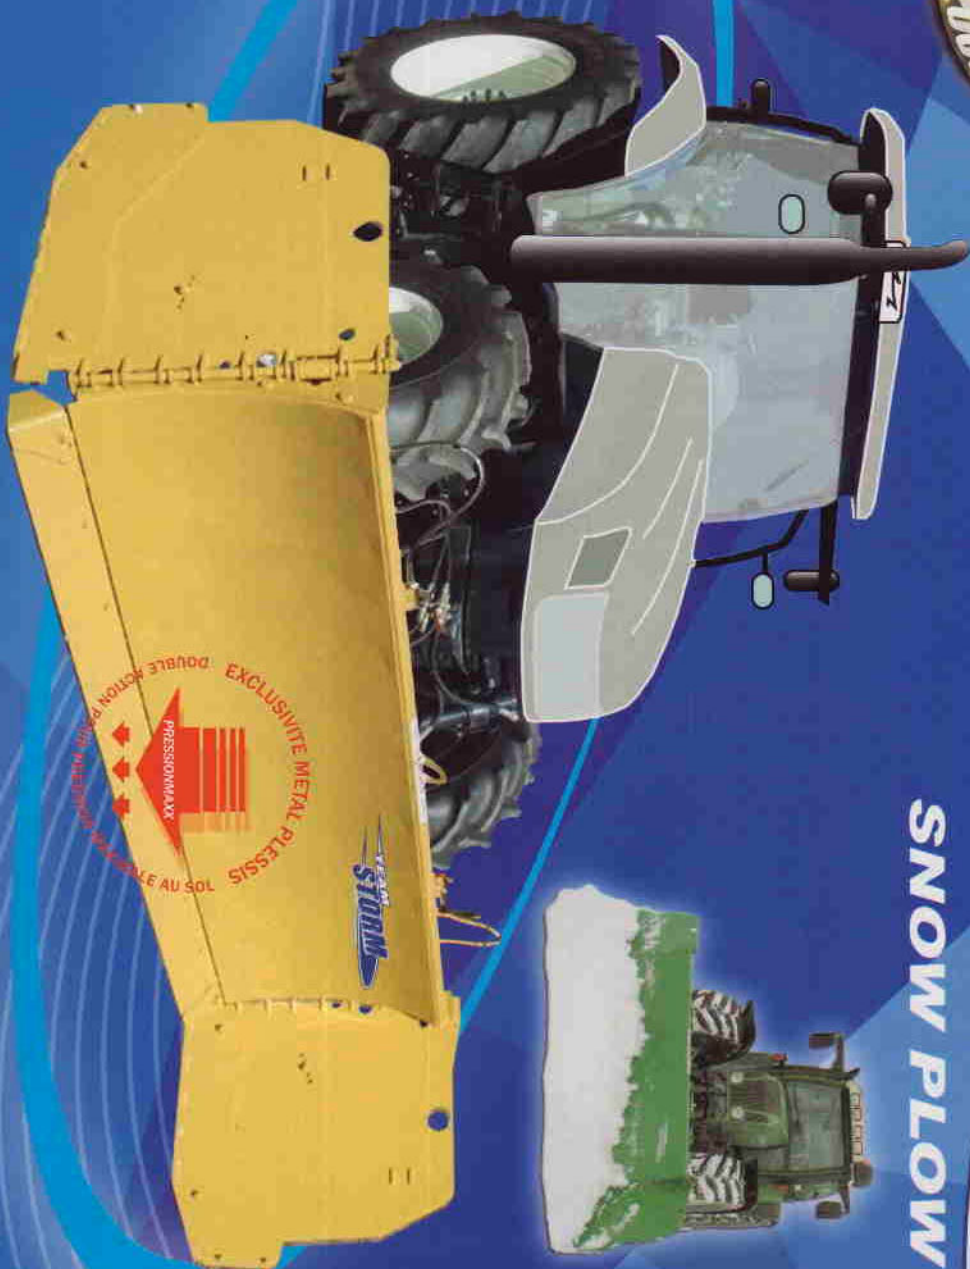

PIMA
Agricultural
Manufacturers of
Canada

APMA
AMERICAN PLOW & MOWER ASSOCIATION

FEMA

SIMA
SOCIÉTÉ INTERNATIONALE
DES MANÉGEURS DE
MACHINES AGRICOLES

NTMA
NATIONAL TRACTOR
MAINTENANCE ASSOCIATION
Member



MAXX EDGE

PRODUCT FEATURES :

- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Bolted universal attachment for skid steer
- Adjustable/removable bolted post receiver system in "U" shape for loader and backhoe
- Heavy duty impacts roller on each abrasion shoes
- Wear pad on abrasive shoes in CHT360
- Chains slots incorporated to the main structure with locks
- Bolt-on removable side panels
- Structure mounted double bracing

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carboloy cutting edge
- Non standard colour
- Industrial or agricultural quick attach

MAXX EDGE



All our products are build of higher quality steel with reinforcement placed strategically to guaranty incomparable strength.



Impacts roller



Mechanical trip edge

MODEL *	WIDTH	HEIGHT	WEIGHT	APPLICATION
MESS0836	8'	36"	900 lbs	1500 lbs skid steer
MESS1036	10'	36"	1025 lbs	1900 lbs skid steer
MESS1236	12'	36"	1150 lbs	2300 lbs skid steer
MEBH1036	10'	36"	1500 lbs	2 WD backhoe
MEBH1236	12'	36"	1650 lbs	4 WD backhoe
MEBH1436	14'	36"	1825 lbs	4 WD backhoe
MELD1242	12'	42"	2350 lbs	1 yd ³ loader
MELD1442	14'	42"	2500 lbs	1.5 yd ³ loader
MELD1642	16'	42"	2650 lbs	2.5 yd ³ loader

* Assembly required approximately 3 hours

PRODUCT FEATURES:

- Extended-life rubber cutting edge 1-1/2" x 10"
- Bolted universal attachment for skid steer
- Adjustable/removable bolted post receiver system in "U" shape for loader and backhoe
- Heavy duty impacts roller on each abrasion shoes
- Wear pad on abrasive shoes in CHT360
- Chains slots incorporated to the main structure with locks
- Structure mounted double bracing
- Bolt-on removable side panels

OPTIONS:

- Steel cutting edge in CHT
- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Non standard colour
- Industrial or agricultural quick attach



Impacts roller

MODEL *	WIDTH	HEIGHT	WEIGHT	APPLICATION
SS0636	6'	36"	675 lbs	1100 lbs skid steer
SS0836	8'	36"	900 lbs	1500 lbs skid steer
SS1036	10'	36"	1025 lbs	1900 lbs skid steer
SS1236	12'	36"	1150 lbs	2300 lbs skid steer
BH1036	10'	36"	1250 lbs	2 WD backhoe
BH1236	12'	36"	1400 lbs	4 WD backhoe
BH1436	14'	36"	1575 lbs	4 WD backhoe
LD1048	10'	48"	2000 lbs	4 WD backhoe
LD1248	12'	48"	2150 lbs	1 yd ³ loader
LD1448	14'	48"	2300 lbs	1.5 yd ³ loader
LD1648	16'	48"	2450 lbs	2.5 yd ³ loader
LD1848	18'	48"	2600 lbs	3.5 yd ³ loader
LD2048	20'	48"	2750 lbs	4.5 yd ³ loader

* Assembly required approximately 3 hours

PRODUCT FEATURES :

- 10 basics hydraulic positions containment plow
- HD hydraulic containment gates in CHT360
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- 3 adjustable cushion valves for hydraulic protection system
- Abrasion resistant self-leveling containment shoes
- Wear pad on abrasive shoes in CHT360
- Adjustable tilt/float moldboard feature
- Standard attachment bracket 30-1/4" OC X 1-1/4" pin diameter for commercial trucks
- This system requires 3 oil outlets

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Non standard colour
- Skates
- Distance control "Joystick" type (Electric over hydraulic 3 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin)



Distance control
"Joystick" type
(Electric over
hydraulic system)
optional



Mechanical
trip edge



MODEL	BLADE POSITION & WIDTH		SIDE GATE WIDTH	HEIGHT	WEIGHT	APPLICATION
	CLOSED	5 COOP EXTENDED				
RM0836-14	8'	11'	36"	36"	1900 lbs	Classe 7 S/A
RM1036-16	10'	13'	36"	36"	2400 lbs	Classe 8 T/A S/A

PRODUCT FEATURES :

- Double action mounts "Pression Maxx" for maximal pressure on the ground
- 10 basics hydraulic positions containment plow
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- HD CHT360 hydraulic containment gates
- 3 adjustable cushion valves for hydraulic protection system
- Abrasion resistant self-leveling containment shoes
- Adjustable tilt/float moldboard feature
- Front extension 30" on each side
- This system requires 6 oil outlets

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Non standard colour
- Skates
- Nitrogen carboy to install on the up and down cylinder
- Distance control "Joystick" type (Electric over hydraulic 6 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin)



Distance control
"Joystick" type
(Electric over
hydraulic system)
optional



Mechanical
trip edge



MODEL	BLADE POSITION & WIDTH			HEIGHT	WEIGHT	APPLICATION
	CLOSED	EXT. ONLY	EXT. AND SIDE GATE			
EXT0836-19**	8'	13'	19'	36"	2700 lbs	80-100 HP
EXT1036-21**	10'	15'	21'	36"	2800 lbs	100-125 HP
EXT1242-24**	12'	17'	24'	42"	3100 lbs	125 HP & up

**Front extension 30" on each side.

SOME VARIATIONS ON BLADE POSITIONS



PRODUCT FEATURES:

- Hydraulic extension 36" on each side
- Bolt-on removable side panels
- Robust steel cutting edge 1/2" x 6"
- Abrasion resistant self-leveling containment shoes
- Female 3 point hitch attachment
- Full tripping system of the blade with four (4) double action springs
- Wear pad on abrasive shoes in CHT360
- Bracing bolted to the main structure and side panels
- This system requires 1 or 2 oil outlets (ask your dealer)

OPTIONS:

- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Rubber cutting edge
- Non standard colour



**EXCLUSIVITY METAL PLISSIS
DOUBLE ACTION SPRINGS**

**TEAM
STORM**

3MAXXX

3MAXXX

MODEL	BLADE POSITION AND WIDTH		HEIGHT	SIDE GATE WIDTH	WEIGHT	APPLICATION
	CLOSED	EXTENDED				
3M 836-14	8'	14'	36"	36"	1200 lbs	60-80 HP
3M 936-15	9'	15'	36"	36"	1500 lbs	80-125 HP
3M 1036-16	10'	16'	36"	36"	1800 lbs	125 HP & up

PRODUCT FEATURES :

- Double action mounts "**Presslon Maxx**" for maximal pressure on the ground
- 10 basics hydraulic positions containment plow
- HD CHT360 hydraulic containment gates
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- 3 adjustable cushion valves for hydraulic protection system
- Wear pad on abrasive shoes in CHT360
- Abrasion resistant self-leveling containment shoes
- Adjustable tilt/float moldboard feature
- This system requires 4 oil outlets

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carbolooy cutting edge
- Non standard colour
- Skates
- Nitrogen carboy to install on the up and down cylinder
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin)

NEW

Improved abrasion shoes to fit the hydraulic side wings to avoid locking up in icing condition



Distance control
"Joystick" type
(Electric over
hydraulic system)
optional


Mechanical
trip edge



SOME VARIATIONS ON BLADE POSITIONS



AGRI MAXXX

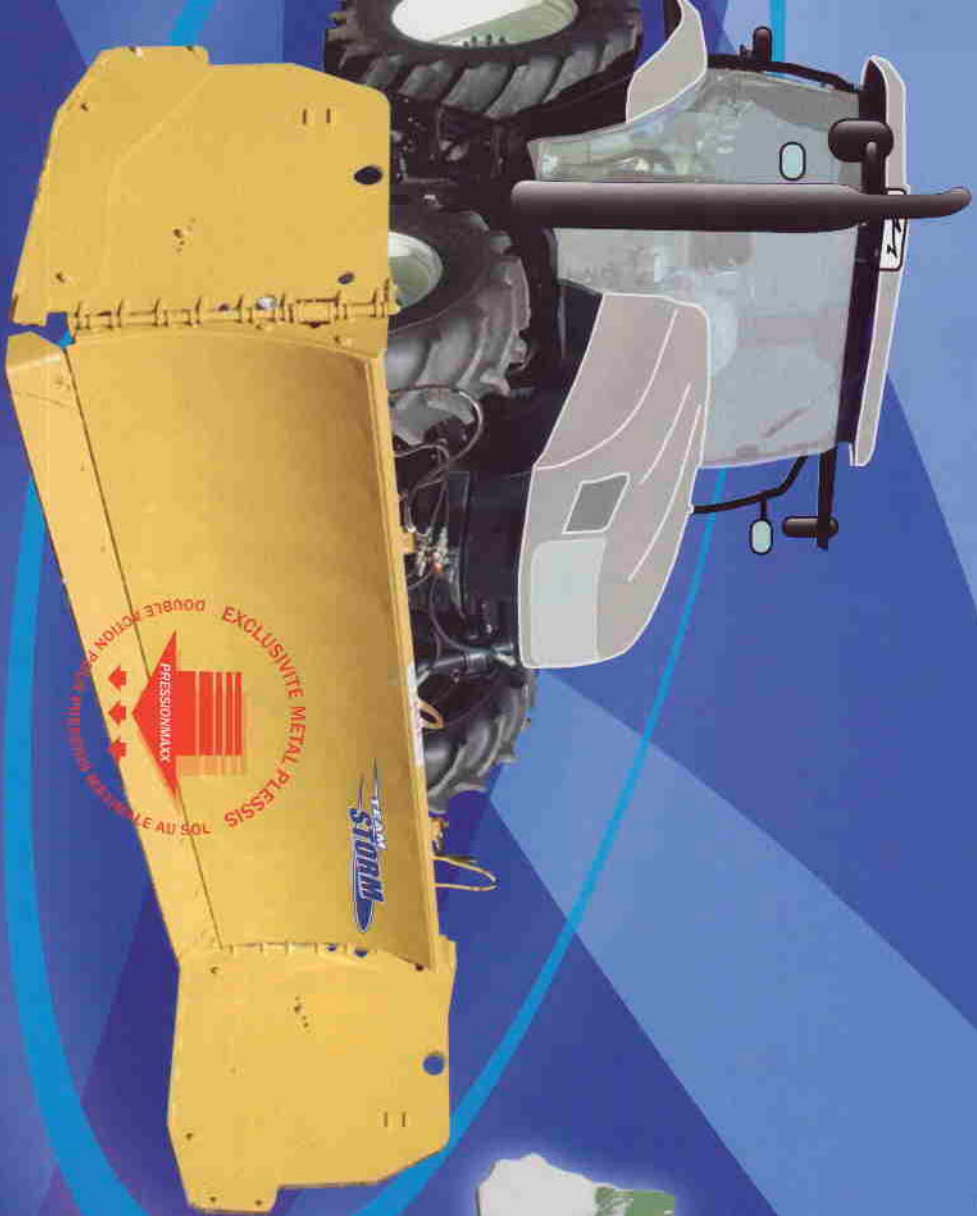

MODEL	BLADE POSITION & WIDTH			SIDE GATE WIDTH	HEIGHT	WEIGHT	APPLICATION
	CLOSED	SCOOP	EXTENDED				
AGH0630-11	6'	8.6'	11'	30"	30"	1000 lbs	40-60 HP
AGH0730-12	7'	9.6'	12'	30"	30"	1200 lbs	60-80 HP
AGH0836-14	8'	11'	14'	36"	36"	1700 lbs	60-80 HP
AGH1036-16	10'	13'	16'	36"	36"	1800 lbs	80-125 HP
AGH1242-19	12'	15.6'	19'	42"	42"	2100 lbs	125 HP & up

AGRI MAXXX

PRODUCT FEATURES :

- Double action mounts "Precision Maxx" for maximal pressure on the ground
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- 1 adjustable cushion valve for hydraulic protection system
- Front blade 12' x 42"
- Adjustable tilt/float moldboard feature
- This system requires 4 oil outlets

OPTIONS :

- Front blade deflector
- Side wing deflector
- Teflon cutting edge 3/4" x 6"
- Carboloy cutting edge
- Non standard colour
- Skates
- Nitrogen carboy to install on the up and down cylinder
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin)

SIDEWING MODEL	WIDTH	HEIGHT	WEIGHT	APPLICATION
WING 12-08	8'	36"	3600 lbs	125 HP & up
WING 12-09	9'	36"	3750 lbs	125 HP & up
WING 12-10	10'	36"	3900 lbs	125 HP & up



Distance control joystick type (Electric over hydraulic system) optional

Mechanical trip edge

TEAM
STORM

WINGMAXX

WINGMAXX

PRODUCT FEATURES :

- Double action mounts "Precision Maxx" for maximal pressure on the ground
- Parallel lifting mounts
- Bolt-on removable side panels 42" x 42"
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Snowplow that pushes and pulls
- Interior and exterior hydraulic quick attach
- This system requires 2 oil outlets

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carboloy cutting edge
- Non standard colour
- Skates
- Nitrogen carboy to install on the up and down cylinder

MODEL	WIDTH	HEIGHT	WEIGHT	APPLICATION
TV145-98	98"	42"	1500 lbs	TV145
TV145-9	9'	42"	1600 lbs	TV145
TV145-10	10'	42"	1700 lbs	TV145
TV145-11	11'	42"	1800 lbs	TV145
TV145-12	12'	42"	1900 lbs	TV145

TEAM
STORM

TV145MAXX

TV145MAXX



Mechanical trip edge



Distance control joystick type (Electric over hydraulic system) optional



SOME VARIATIONS ON BLADE POSITIONS



PRODUCT FEATURES:

- Double action mounts "Precision Maxx" for maximal pressure on the ground
- 10 basics hydraulic positions containment plow
- Heavy duty CHT360 hydraulic containment gates
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- 3 adjustable cushion valves for hydraulic protection system
- Abrasion resistant self-leveling containment shoes
- Adjustable tilt/float moldboard feature
- Heavy duty post receiver mounting brackets for loaders
- Distance control "Joystick" type (Electric over hydraulic 3 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin)
- This system requires 3 oil outlets

OPTIONS:

- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Non standard colour
- Skates
- Industrial or agricultural quick attach

PRODUCT FEATURES:

- Double action mounts "Precision Maxx" for maximal pressure on the ground
- 10 basics hydraulic positions containment plow heavy duty
- Heavy duty CHT360 hydraulic containment gates
- Robust 24" multi-section steel trip edge 3/4" x 8" with two springs each section
- 3 adjustable cushion valves for hydraulic protection system
- Abrasion resistant self-leveling containment shoes
- Adjustable tilt/float moldboard feature
- Female quick attach (to specify)
- Skates heavy duty under the attachment
- Distance control "Joystick" type (Electric over hydraulic 3 spools mounted on blade with *flow divider*, electric control and necessary cable for the installation in the tractor cabin)
- This system requires 3 oil outlets

OPTIONS:

- Teflon cutting edge 1" x 8"
- Carboly cutting edge
- Non standard colour

Distance control
"Joystick" type
(Electric over
hydraulic system)

Mechanical
trip edge



MODEL	BLADE POSITION & WIDTH		SIDE GATE WIDTH	HEIGHT	WEIGHT	APPLICATION
	CLOSED	SCOOP				
PLSS0630-11	6'	8.6'	11'	30"	1150 lbs	1500 lbs skid steer
PLSS0730-12	7'	9.6'	12'	30"	1350 lbs	1900 lbs skid steer
PLBH0836-14	8'	11'	14'	36"	1500 lbs	2 WD backhoe
PLBH1036-16	10'	13'	16'	36"	1700 lbs	4 WD backhoe
PLLD1242-19	12'	15.6'	19'	42"	2400 lbs	1 yd ³ loader

Distance control
"Joystick" type
(Electric over
hydraulic system)

Mechanical
trip edge




MODEL	BLADE POSITION & WIDTH			SIDE GATE WIDTH	HEIGHT	WEIGHT	APPLICATION
	CLOSED	SCOOP	EXTENDED				
PRO 1042-17	10'	13.6'	17'	42"	42"	3000 lbs	Industrial loader
PRO 1242-20	12'	16'	20'	48"	42"	3200 lbs	Industrial loader
PRO 1442-25	14'	19.6'	25'	66"	42"	3700 lbs	Industrial loader
PRO 1642-30	16'	23'	30'	84"	42"	3800 lbs	Industrial loader
PRO 1842-35	18'	26.6'	35'	102"	42"	4100 lbs	Industrial loader

MAXXPRO

PLOWMAXX

PRODUCT FEATURES:

- Loading grate in 1/4" wire mesh
- Mobile parts are greasable
- Chain tension adjustable
- Adjustable discharge flow and/or width for spreading area
- Electric brake system
- Frame made out of superior quality 1/4" steel
- Security lights installed
- Capacity 1,5 yd³
- This system requires 1 oil outlet

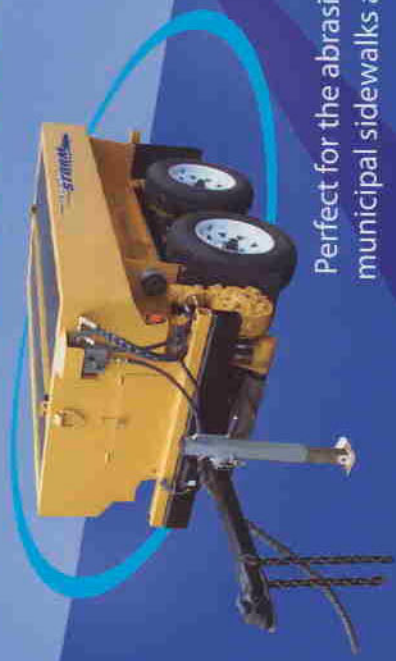

Perfect for the abrasives spreading on municipal sidewalks and parking areas

MODEL	BOX LENGTH	TOTAL LENGTH	WIDTH	*SURFACE WIDTH	HEIGHT	WEIGHT	APPLICATION
SM 1500	88-3/4"	124-3/4"	48"	60"	60"	1200 lbs	Motorized vehicle with hydraulic unit

Price List

*Spreading surface

PRODUT FEATURES :

- 6 basics hydraulic positions containment plow
- Heavy duty single section mechanical steel trip edge 1/2" x 6"
- Adjustable tilt/float moldboard feature
- Sub frame harness with left/right and lift cylinder apparatus
- 1 adjustable cushion valve for hydraulic protection system
- This system requires 2 oil outlets

OPTIONS :

- Carboloy cutting edge
- Teflon cutting edge 3/4" x 6"
- Non standard colour
- Heavy duty 18" hydraulic plow extension
- Tilt 12" hydraulic pivot from up/down
- Wheel out of true, 14" hydraulic sliding sideways (5" to the left and 9" to the right)
- Distance control "Joystick" type (Electric over hydraulic with spools mounted on blade, electric control and necessary cable for the installation in the tractor cabin)



Distance control "Joystick" type (Electric over hydraulic system) optional



Total reaction time: 2 seconds
10 gpm pump



MODEL	BLADE POSITION CLOSED	Extension (in option)	EXTENSION WIDTH	HEIGHT	WEIGHT	APPLICATION
SM 525	5'	6.6'	18"	25"	800 lbs	Compact tractor, skid steer, Trackless and Bombardier



PRODUCT FEATURES :

- 18" hydraulic extensions on each side
- Bolt-on removable 25" side panels
- Teflon cutting edge 1/2" x 6"
- Fixed side gates abrasion shoes
- Female 3 point hitch attachment
- This system requires 1 or 2 oil outlets (ask your dealer)

OPTION :

- Non standard colour

MODEL	BLADE POSITION		HEIGHT	WEIGHT	APPLICATION
	CLOSED	EXTENDED			
3Mjr 625-9	6'	9'	25"	450 lbs	Tractor only Light application

PRODUCT FEATURES :

- Teflon cutting edge 1/2" x 6"
- Bolt-on removable side panels
- Without pivot system
- Standard skid steer attachment

OPTIONS :

- Non standard colour
- Agricultural quick attach
- Compact tractor mounts

MODEL	WIDTH	HEIGHT	WEIGHT	APPLICATION
MM7425	74"	25"	200 lbs	Tractor, skid steer Light application

PRODUCT FEATURES :

- Heavy duty steel trip edge 1/2" x 6"
- Full tripping system of the blade
- 1 adjustable cushion valve for hydraulic protection system
- Adjustable tilt/float moldboard feature
- This system requires 1 oil outlet

OPTIONS :

- Teflon cutting edge 3/4" x 6"
- Carboly cutting edge
- Non standard colour
- Skates
- Agricultural quick attach
- Additional oil outlet (3rd function)

MODEL	WIDTH	HEIGHT	WEIGHT	APPLICATION
PLjr-625	6'	25"	425 lbs	40 HP tractor loader
PLjr-725	7'	25"	515 lbs	50 HP tractor loader
PLjr-825	8'	25"	619 lbs	60 HP tractor loader

