



AGRI MAXX

2009

FARM TRACTOR MODELS

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 1 of 18

PRODUCT FEATURES :

- Universal mount exclusive Metal Pless
- Double action mounts "**Pression Maxx**" exclusive Metal Pless
- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic containment gates made of heavy duty steel
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- Wear pad on abrasive shoes in heavy duty steel
- Abrasion resistant self-leveling skid shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- This system requires 4 oil outlets

OPTIONS (see page 17-18) :

- Silage (includes deflector and hydraulic tilt) (SLG)
- Teflon cutting edge 3/4" x 6" (TCE3/4)
- Carboloy cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin (JSC4)




Model	Blade position & width			Height & side wing width	Application	Weight of the blade	* Retail price
	Closed	Scoop	Extended				
AGH0630-11	6'	8'6"	11'	30"	40 - 60 HP	1500 lbs	
AGH0730-12	7'	9'6"	12'	30"	60 - 80 HP	1785 lbs	
AGH0830-13	8'	10'6"	13'	30"	70 - 90 HP	2070 lbs	
AGH0836-14	8'	11'	14'	36"	80 - 100 HP	2183 lbs	
AGH1036-16	10'	13'	16'	36"	100 - 125 HP	2375 lbs	
AGH1242-19	12'	15'6"	19'	42"	125 HP & up	2700 lbs	

*Price include blade, angular system and tractor subframe

NON INCLUDED : Hoses and connectors from de blade to the tractor

- Subframe available for other models sold seperatly (see page 17)
- Terms, conditions and general information (see page 18)



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

F.O.B. PLESSISVILLE, QC

PRODUCT OF CANADA

PRICES SUBJECT TO CHANGE WITHOUT NOTICE



SOFT drive trip edge - Exclusivity Metal Pless

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 2 of 18

PRODUCT FEATURES :

- Universal mount exclusive Metal Pless
- Double action mounts "**Pression Maxx**" exclusive Metal Pless
- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic containment gates made of heavy duty steel
- Heavy duty multi-section mechanical **SOFT drive** steel trip edge 1/2" x 6"
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- Wear pad on abrasive shoes in heavy duty steel
- Trip abrasion shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- This system requires 4 oil outlets

OPTIONS (see page 17-18) :

- Silage (includes deflector and hydraulic tilt) (SLG)
- Teflon cutting edge 3/4" x 6" (TCE3/4)
- Carboloy cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin (JSC4)




Model	Blade position & width			Height & side wing width	Application	Weight of the blade	* Retail price
	Closed	Scoop	Extended				
AGplus0736-13	7'	10'	13'	36"	60 - 90 HP	1885 lbs	
AGplus0836-14	8'	11'	14'	36"	80 - 100 HP	2183 lbs	
AGplus1036-16	10'	13'	16'	36"	100 - 125 HP	2375 lbs	
AGplus1242-19	12' hors tout	15'6"	19'	42"	125 HP & up	2700 lbs	

*Price include blade, angular system and tractor subframe

NON INCLUDED : Hoses and connectors from de blade to the tractor

- Subframe available for other models sold seperatly (see page 17)
- Terms, conditions and general information (see page 18)

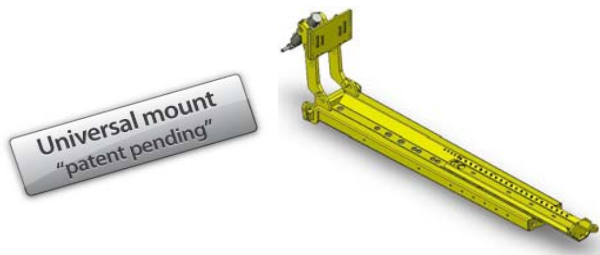

Universal mount
"patent pending"



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.





VC465



FARM TRACTOR MODELS
TURF & LANDSCAPE
TAB: SNOW REMOVAL

SOFT drive trip edge - Exclusivity Metal Pless

MAY 1/09
Page 3 of 18

PRODUCT FEATURES :

- Universal mount exclusive Metal Pless
- Double action mounts "**Pression Maxx**"
- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic containment gates made of heavy duty steel
- **SOFT drive** mechanical steel trip edge heavy duty multi-section 3/4" x 6" x 24"
- Double row of hydraulic cylinders on side wings to give it extra hold
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- Wear pad on abrasive shoes
- **Trip** abrasion shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- Support and wear skates behind the cutting edge
- This system requires 4 oil outlets



patent pending

OPTIONS (see page 17-18) :

- 3 point attachment (A3P)
- Carbology cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin (JSC4))


Model	Blade position & width			Height & side wing width	Application	Weight of the blade	* Retail price
	Closed	Scoop	Extended				
CT1048-18	10'	14'	18'	48"	100 HP - UP	3109 lbs	
CT1248-20	12'	16'	20'	48"	125 HP - UP	3404 lbs	

*Price include blade, angular system and tractor subframe

- Subframe available for other models sold separatly (see page 17)

NON INCLUDED : Hoses and connectors from de blade to the tractor

- Terms, conditions and general information (see page 18)

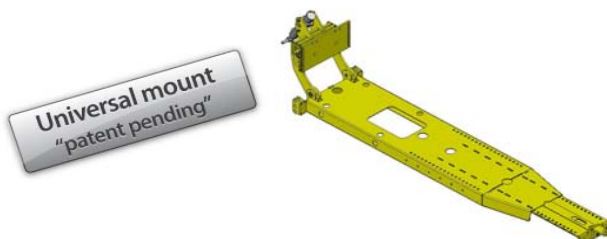

Universal mount
"patent pending"



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



Extension system and SOFT drive trip edge EXCLUSIVITY METAL PLESS

TURF & LANDSCAPE
MAY 1/09
Page 4 of 18

PRODUCT FEATURES :

- Universal mount exclusive Metal Pless
- Double action mounts "**Pression Maxx**" for maximal pressure on the ground
- Fixed bolt on side panels
- **SOFT drive** mechanical steel trip edge 1/2" x 6"
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the angular system and * side gates if applicable)
- Abrasion resistant self-leveling skid shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- This system requires 1 or 2 oil outlets (ask your dealer)

OPTIONS (see page 17-18) :

- Hydraulic side gates (OPT4)
- Straight extension (EXS)
- 3 points attachment (A3P)
- Carboloy cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)
- Distance control "Joystick" type (Electric over hydraulic mounted on blade with electric control and necessary cable for the installation in the tractor cabin)

patent pending




Model	Blade position & width			Height and width of the side wings	Application	Weight of the blade	*Retail price
	Closed	Extended ext. Only	Option (OPT4) Ext. Extended and side gates				
EXT0736-11	7'	11'	17'	36"	80 - 100 HP	2700 lbs	
EXT0836-13	8'	13'	19'	36"	80 - 100 HP	2700 lbs	
EXT1036-15	10'	15'	21'	36"	100 - 125 HP	2892 lbs	
EXT1248-19	12'	19'	27'	48"	125 HP & up	3217 lbs	

*Price include blade, angular system and tractor subframe

- Subframe available for other models sold separately (see page 17)

NON INCLUDED : Hoses and connectors from de blade to the tractor

- Terms, conditions and general information (see page 18)

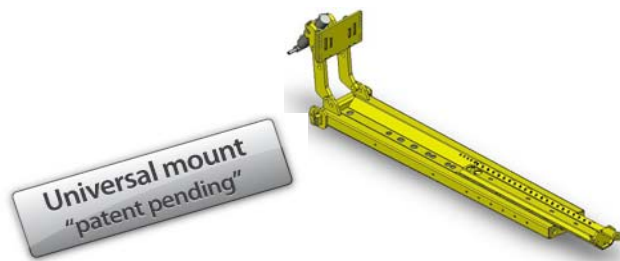

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

Extension system and SOFT drive trip edge EXCLUSIVITY METAL PLESS

TURF & LANDSCAPE
TAB: SNOW REMOVAL

MAY 1/09

Page 5 of 18

PRODUCT FEATURES :

- Multiple hydraulic positions for maximum capacity (heavy duty)
- **SOFT** drive mechanical steel trip edge heavy duty multi-section 3/4" x 6" x 24" (EXHD1048-21 and EXHD1248-29)
- Double row of hydraulic cylinders on side wings to give it extra hold
- Hydraulic containment gates made of heavy duty steel
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- **Trip** abrasion shoes
- Female quick attach (to be specified)
- Skates heavy duty under the attachment
- Distance control "Joystick" type (Electric over hydraulic 5 spools (7 with option EXSHD) mounted on blade with flow divider, electric control and necessary cable for the installation in the loader cabin)
- Lateral floating of the blade
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- Extension straight heavy duty (EXSHD)
- Carboloy cutting edge (CCE1)
- Non standard colour (NSC1)



Model	Blade position & width			Height of the blade	Application	Weight	* Retail price
	Closed	Extended-extension only	Extended ext. and side gates				
**EXHD0836-19	8'	13'	19'	36"	Industrial loader 1,5 yd	4317 lbs	
EXHD1048-21	10'	15'	23'	48"	Industrial loader 2,5 yd	4629 lbs	
EXHD1248-29	12'	19'	29'	48"	Industrial loader 2,5 yd	5100 lbs	

*Price include blade, angular system and quick attach for industrial loader

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

- Terms, conditions and general information (see page 18)

** Single row of hydraulic cylinder on side wings



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



SKID STEER, LOADER, BACKHOE MODELS

PRODUCT FEATURES :


- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Bolted universal attachment for skid steer Model Mini-MESS)
- Bolted post receiver system in "U" shape for loader and backhoe (Model MEBH and MELD)
- Wear pad on abrasive shoes (MESS-MEBH-MELD)
- Chains slots incorporated to the main structure (MEBH-MELD)
- Bolt-on side panels
- Structure mounted double bracing

OPTIONS (see page 17-18) :

- Teflon cutting edge 3/4" x 6" (TCE3/4)
- **Soft** trip edge (MaxxEdgePLUS) OP+
- Non standard colour (NSC1)
- Industrial quick attach (IQA) or agricultural quick attach

OPTIONS model MSM MINI :

- Model closed top 6' x 24"/514\$ 6' x 30"/738\$
7' x 24"/582\$ 7' x 30"/775\$
8' x 24"/649\$ 8' x 30"/814\$

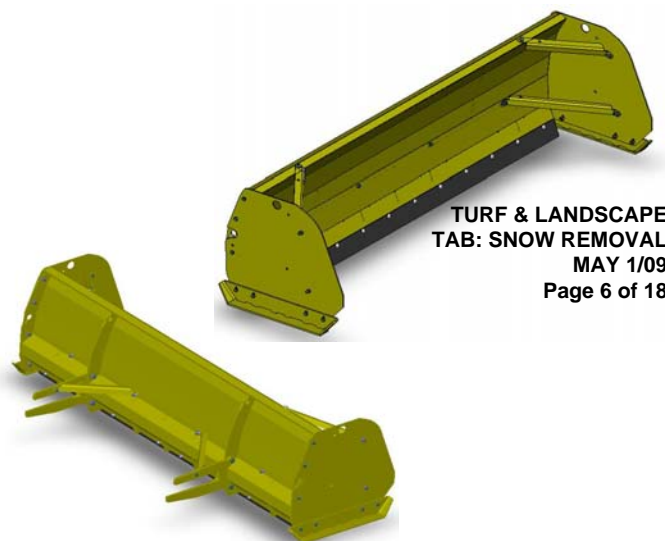

TURF & LANDSCAPE
TAB: SNOW REMOVAL

MAY 1/09

Page 6 of 18


- 3 point 24"/757\$ 30"/1047\$
- Antichocs pivot side 180 degrees 145\$

	Model	Width	Height	Application	Weight	Retail price
MINI S E R I E	**MSM0624	6'	24"	Tractor 25 to 45 HP	N/D	
	**MSM0724	7'	24"	Tractor 25 to 45 HP	N/D	
	**MSM0824	8'	24"	Tractor 25 to 45 HP	N/D	
	**MSM0630	6'	30"	Tractor 45 to 80 HP	N/D	
	**MSM0730	7'	30"	Tractor 45 to 80 HP	N/D	
	**MSM0830	8'	30"	Tractor 45 to 80 HP	N/D	
	MESS0836	8'	36"	1500 lbs SKID STEER	900 lbs	
	MESS1036	10'	36"	1900 lbs SKID STEER	1025 lbs	
	MESS1236	12'	36"	2300 lbs SKID STEER	1150 lbs	
	MEBH1036	10'	36"	2 WD BACKHOE	1500 lbs	
	MEBH1236	12'	36"	4 WD BACKHOE	1650 lbs	
	MEBH1436	14'	36"	4 WD BACKHOE	1825 lbs	
	MELD1242	12'	42"	1 cu. yd. LOADER	2350 lbs	
	MELD1442	14'	42"	1.5 cu. yd. LOADER	2500 lbs	
	MELD1642	16'	42"	2.5 cu. yd. LOADER	2650 lbs	

** comes with carbon steel cutting edge

- Assembly required; 3 hours estimated assembly time.
- Terms, conditions and general information (see page 18)

Fold to ship from the factory for outside customers



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

SOFT drive trip edge - Exclusivity Metal Pless

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 7 of 18

PRODUCT FEATURES :

- **SOFT drive** heavy duty multi-section mechanical steel trip edge 3/4" x 6" x 24"
- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic side gates made of heavy duty steel
- Double row of hydraulic cylinders on side wings to give it extra hold
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- **Trip** abrasion shoes
- Wear pad on abrasive shoes
- Adjustable tilt/float moldboard feature
- Female quick attach (to be specified)
- Skates heavy duty under the attachment
- Distance control "Joystick" type (Electric over hydraulic 3 spools mounted on blade with flow divider, electric control and necessary cable for the installation in the motorized vehicle)
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- Carboloy cutting edge (CCE1)
- Non standard colour (NSC1)



Model	Blade position & width			Height	Side gate Width	Application	Weight	Retail Price
	Closed	50% extended	Extended					
PRO 1048-18	10'	13'6"	18'	48"	48"	Ind. Loader 1,25 yd	3000 lbs	
PRO 1248-20	12'	16'	20'	48"	48"	Ind. Loader 1,5 yd	3200 lbs	
PRO 1448-25	14'	19'6"	25'	48"	66"	Ind. Loader 2 yd	3700 lbs	
PRO 1648-30	16'	23'	30'	48"	84"	Ind. Loader 2 yd	3800 lbs	

NON INCLUDED : Hoses and connectors from de blade to the industrial loader

- Terms, conditions and general information (see page 18)



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



PRODUCT FEATURES :

- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic containment gates made of heavy duty steel
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Hydraulic shock (3 adjustable cushion valves for hydraulic protection system on the side gates and angular system)
- Abrasion resistant self-leveling skid shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- Distance control "Joystick" type (Electric over hydraulic 3 spools mounted on blade with electric control and necessary cable for the installation in the motorized vehicle)
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- **SOFT drive** steel cutting edge (PlowMaxxPLUS) (OP+)
- Teflon cutting edge 3/4" x 6" (TCE3/4)
- Carboly cutting edge (CCE)
- Non standard colour (NSC1)
- Lengthen hydraulic side wing of 10" (ROH)
- Industrial quick attach for PLBH and PLLD (IQA) or agricultural quick attach



TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 8 of 18



Model	Blade position & width			Height & side gate width	Application	Weight	Retail price
	Closed	Scoop	Extended				
PLSS0630-11	6'	8'6"	11'	30"	1500 lbs Skid steer	1500 lbs	
PLSS0730-12	7'	9'6"	12'	30"	1900 lbs Skid steer	1785 lbs	
PLSS0830-13	8'	10'6"	13'	30"	1900 lbs Skid steer	2070 lbs	
PLBH0836-14	8'	11'	14'	36"	2 WD BACKHOE	2183 lbs	
PLBH1036-16	10'	13'	16'	36"	4 WD BACKHOE	2375 lbs	
PLLD1242-19	12'	15'6"	19'	42"	1 cu. yd. LOADER	2700 lbs	

NON INCLUDED : Hoses and connectors from de blade to the skid steer, loader or back hoe

- Terms, conditions and general information (see page 18)



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



PUSHERMAXX

2009

VC465

PRODUCT FEATURES :

- Extended-life rubber cutting edge 1-1/2" x 10" (SS-BH-LD)
- Bolted universal attachment for skid steer (MINI-SS)
- Bolted post receiver system in "U" shape for loader and backhoe (BH-LD)
- Wear pad on abrasive shoes (SS-BH-LD)
- Chains slots incorporated to the main structure (BH-LD)
- Structure mounted double bracing
- Bolt-on side panels

OPTIONS (see page 17-18) :

- Non standard colour (NSC1)
- Industrial quick attach for BH and LD model (IQA) or agricultural quick attach


OPTIONS model PSM MINI :

- Model closed top

6' x 24"/394\$	6' x 30"/618\$	- 3 point	24"	30"/
7' x 24"/442\$	7' x 30"/635\$	- Antichoc pivot side 180 degrees	145\$	
8' x 24"/489\$	8' x 30"/654\$			

SKID STEER, LOADER, BACKHOE MODELS

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 9 of 18

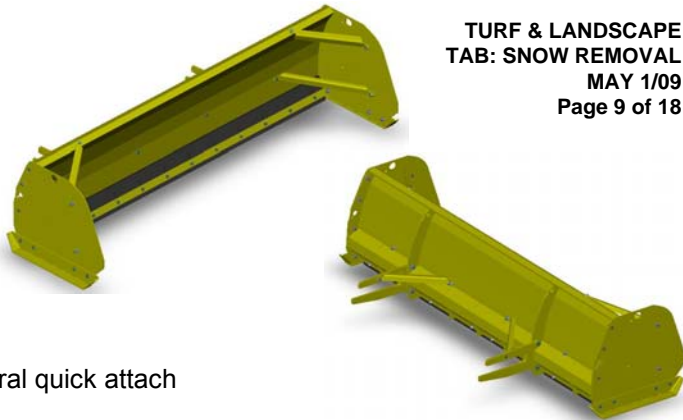


	Model	Width	Height	Application	Weight	Price
MINI S E R I E	**PSM0624	6'	24"	Tractor 25 to 45 HP	N/D	
	**PSM0724	7'	24"	Tractor 25 to 45 HP	N/D	
	**PSM0824	8'	24"	Tractor 25 to 45 HP	N/D	
	**PSM0630	6'	30"	Tractor 45 to 80 HP	N/D	
	**PSM0730	7'	30"	Tractor 45 to 80 HP	N/D	
	**PSM0830	8'	30"	Tractor 45 to 80 HP	N/D	
	SS0636	6'	36"	1100 lbs skid steer	675 lbs	
	SS0836	8'	36"	1500 lbs skid steer	900 lbs	
	SS1036	10'	36"	1900 lbs skid steer	1025 lbs	
	SS1236	12'	36"	2300 lbs skid steer	1150 lbs	
	BH1036	10'	36"	2 WD BACKHOE	1250 lbs	
	BH1236	12'	36"	4 WD BACKHOE	1400 lbs	
	BH1436	14'	36"	4 WD BACKHOE	1575 lbs	
	LD1048	10'	48"	4 WD BACKHOE	2000 lbs	
	LD1248	12'	48"	1 cu. yd. LOADER	2150 lbs	
	LD1448	14'	48"	1.5 cu. yd. LOADER	2300 lbs	
	LD1648	16'	48"	2.5 cu. yd. LOADER	2450 lbs	
	LD1848	18'	48"	3.5 cu. yd. LOADER	2600 lbs	
	LD2048	20'	48"	4.5 cu. yd. LOADER	2750 lbs	

** Comes with steel cutting edge

- Assembly required (Approx. 3 hours assembly time)
- Terms, conditions and general information (see page 18)


Fold to ship from the factory for outside customers



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

FOR TRACTOR LOADER
AND SKID STEER

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 10 of 18

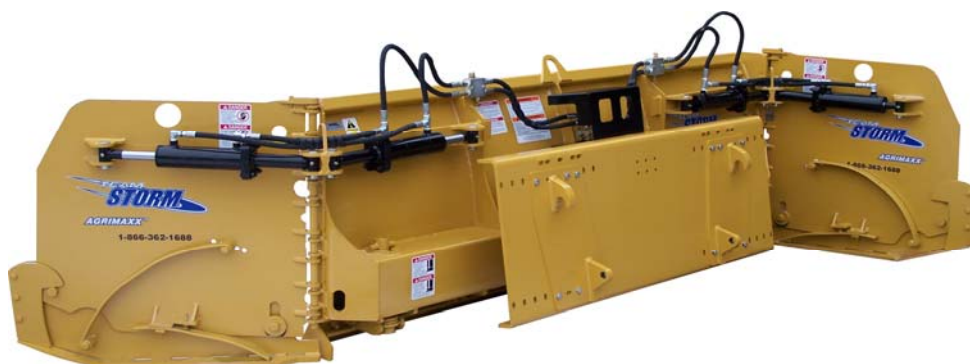

PRODUCT FEATURES :

- Multiple hydraulic side wings positions for maximum capacity
- Hydraulic side gates made of heavy duty steel
- Heavy duty multi-section mechanical steel trip edge 1/2" x 6"
- Hydraulic shock (2 adjustable cushion valves for hydraulic protection system on the side gates)
- Abrasion resistant self-leveling skid shoes
- Lateral floating of the blade
- Double valve outlet selector installed on the blade
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- Silage (includes deflector and hydraulic tilt) (SLG)
- **SOFT drive** steel cutting edge (ReverseMaxxPLUS) (OP +)
- Teflon cutting edge 3/4" x 6" (TCE3/4)
- Carbolo cutting edge (CCE)
- Non standard colour (NSC1)
- Lengthen hydraulic side wing of 10" (ROH)
- Quick attach (see page 18)



Model	Blade position & width			Height & side gate width	Application	Weight	Retail price
	Closed	Scoop	Extended				
REVM0630-11	6'	8'6"	11'	30"	40 - 60 HP & skid steer	1390 lbs	
REVM0730-12	7'	9'6"	12'	30"	60 - 80 HP & skid steer	1625 lbs	
REVM0830-13	8'	10'6"	13'	30"	70 - 90 HP & skid steer	1887 lbs	
REVM0836-14	8'	11'	14'	36"	80 - 100 HP & skid steer	2000 lbs	
REVM1036-16	10'	13'	16'	36"	100 - 125 HP & skid steer	2190 lbs	

NON INCLUDED : Hoses and connectors from de blade to the tractor front end loader or skid steer

- Terms, conditions and general information (see page 18)

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

FOR TRACTOR LOADER AND SKID STEER

(optional - mounts for tractor)

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 11 of 18



PRODUCT FEATURES :

- **Extensible** and **reversible** snow plow
- Floating skid shoes in both directions
- Reversible angle cutting edge for more speed in plowing
- Lateral floating of the blade
- Design to make the snow roll on the blade
- Hydraulic tripping system of the blade
- Various models of bolted quick attach to be specified
- Speed rotation adjustable (inferior to 5 sec.)
- Double valve outlet selector installed on the blade
- Steel cutting edge 1/2" (R2 6-10LT 3/8")
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- Tractor mounts (HAT)
- Flow "divider" to make the extension go out and back in at the same time (FDE)
- Nitrogen carboy to install on the tripping system (9.4 in3) (AAC)
- Non standard colour (NSC1)
- Quick attach (see page 18)
- Hydraulic hoses (see page 18)
- Teflon cutting edge (to be specified, same price as steel)
- Stainless cutting edge for model 6-10 (CEST1)
- Stainless cutting edge for model 7-12 (CEST2)

patent pending



Model	Blade position & width		Hight of the blade	Side gate width	Application	Approx. weight	Retail price
	Closed	Extended					
R2 5,5-8	5.5'	8'	23"	15 "	40 - 60 HP & skid steer	750 lbs	
R2 6-10LT*	6'	10'	26"	17"	40 - 60 HP & skid steer	892 lbs	
R2 6-10	6'	10'	26"	17"	60 - 80 HP & skid steer	1081 lbs	
R2 7-12	7'	12'	32"	22"	80 - 120 HP & skid steer	1740 lbs	

* R2 6-10LT light version, teflon cutting edge for backward position, steel cutting edge in 3/8" CHTnon reversible instead of 1/2" reversible

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

- Terms, conditions and general information (see page 18)




Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.





MUNICIPAL SIDEWALK SNOWPLOW MODEL

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 12 of 18

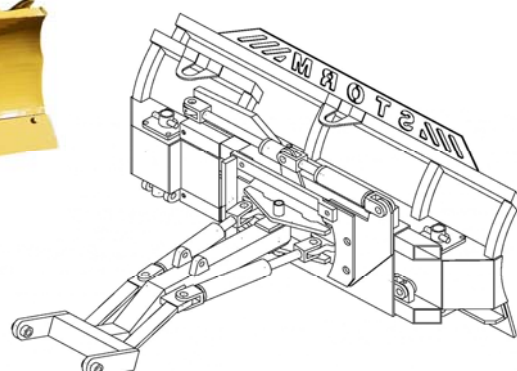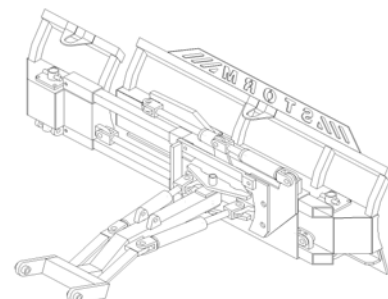
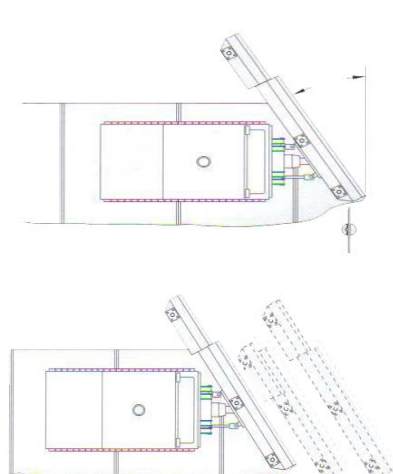


PRODUCT FEATURES :

- Double action mounts "Pression Maxx"
- Heavy duty single section mechanical steel trip edge 1/2" x 6"
- Adjustable angular system of the blade
- Hydraulic shock (1 adjustable cushion valves for hydraulic protection system on the angular system)
- This system requires 2 standard oil outlets

OPTIONS (see below and page 17-18) :

- Carboloy cutting edge (CCE)
- Non standard colour (NSC1)
- Distance control "Joystick" type (see page 17)



Model	Dimension	Retail price
SM525	Front blade 60" width x 25" height with compact tractor mounts	
Option :		
Option # 1	Heavy duty 18" hydraulic plow extension	
Option # 2	"TILT" 12" hydraulic pivot from down/up	
Option # 3	Wheel out of true, 14" hydraulic sliding sideways (5" to the left and 9" to the right)	
*** for option 1, 2 and 3 you need an additionnal oil outlet per option		

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

- Terms, conditions and general information (see page 18)

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

VC465



SOFT drive trip edge - Exclusivity Metal Pless

TRACTOR MODELS

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 13 of 18



PRODUCT FEATURES :

- Heavy duty **SOFT drive** multi-section mechanical steel trip edge 1/2" x 6"
- Hydraulic shock (1 adjustable cushion valves for hydraulic protection system on the angular system)
- Electric 12 volts central console for the operator with joystick 4 functions
- Parker pump with electric clutch 12 volts
- Quick attach system that requires only 5 minutes to take apart the snow plow and the side wings from the truck
- Front blade 10' x 36"
- Lateral floating of the blade
- Front blade deflector
- Low profile side wing with deflector and **SOFT drive** mechanical trip edge

OPTIONS (see page 17-18) :

- Carboly cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)



MODEL	WIDTH	HEIGHT	APPLICATION	Weight of the blade	* RETAIL PRICE
SIDE WING					
WING 10-08	8'	36"	Truck	N/A	
WING 10-09	9'	36"	Truck	N/A	
WING 10-10	10'	36"	Truck	N/A	

*Retail price includes front and side wing blade, pivot system and mounts

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

- Terms, conditions and general information (see page 18)



Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



VC465

WINGMAXX
2009

SOFT drive trip edge - Exclusivity Metal Pless

TRACTOR MODELS

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 14 of 18

PRODUCT FEATURES :

- Universal mount exclusive Metal Pless
- Double action mounts "**Pression Maxx**"
- **SOFT** drive mechanical steel trip edge heavy duty multi-section 3/4" x 6" x 24"
- Hydraulic shock (1 adjustable cushion valves for hydraulic protection system on the angular system)
- Front blade 12' x 42"
- Adjustable angulation of the blade
- Lateral floating of the blade
- Front blade deflector
- Side wing deflector
- This system requires 4 oil outlets

OPTIONS (see page 17-18) :

- Carboloy cutting edge (CCE)
- Non standard colour (NSC1)
- Nitrogen carboy to install on the up and down cylinder (AAC)
- Distance control "Joystick" type (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cabin (JSC4))




MODEL	WIDTH	HEIGHT	APPLICATION	Weight of the blade	* RETAIL PRICE
SIDE WING					
WING 12-08	8'	36"	125 HP & up	3600 lbs	
WING 12-09	9'	36"	125 HP & up	3750 lbs	
WING 12-10	10'	36"	125 HP & up	3900 lbs	

*Retail price includes front and side wing blade, pivot system and mounts

- Subframe including pivot system if bought separately (MKS5) 1360 lbs (see page 18)

NON INCLUDED : Hoses and connectors from the blade to the motorized vehicle

- Terms, conditions and general information (see page 18)

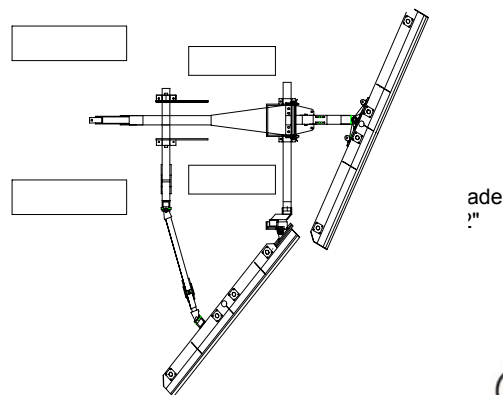

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



3 POINT HITCH MODELS

TURF & LANDSCAPE

TAB: SNOW REMOVAL

MAY 1/09 Page 15 of 18



PRODUCT FEATURES :

- Hydraulic extension 36" on each side
- Bolt-on side panels
- Robust steel cutting edge 1/2" x 6"
- Abrasion resistant self-leveling skid shoes
- Female 3 point hitch attachment
- Full tripping system of the blade with four (4) double action springs
- Bracing bolted to the main structure and side panels
- This system requires 1 or 2 oil outlets (ask your dealer)


OPTIONS (see page 17-18) :

- Flow "divider" to make the extension go out and back in at the same time (FDE)
- Non standard colour (NSC1)



Model	Blade position & width		Height & side wing width	Application	Weight	Retail price
	Closed	Extended				
3M 836-13	8'	13'	36"	80-125 HP	N/D	
3M 1036-16	10'	16'	36"	125 HP & up	N/D	

- Terms, conditions and general information (see page 18)

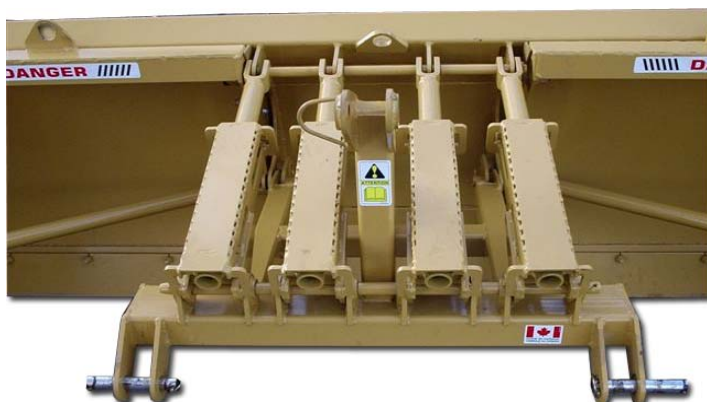

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.

COMPACT SERIES

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 16 of 18

PLOWMAXXjr

PRODUCT FEATURES :

- Heavy duty steel trip edge 1/2" x 6"
- Full tripping system of the blade
- Hydraulic shock (1 adjustable cushion valves for hydraulic protection system on the angular system)
- Lateral floating of the blade
- This system requires 1 oil outlet

OPTIONS (see page 17-18) :

- Teflon cutting edge 3/4" x 6" (TCE3/4)
- Non standard colour (NSC1)
- Agricultural quick attach (see page 18)



Model	Width	Height	Application	Weight	Retail price
PLjr 625	6'	25"	40 HP tractor loader, skid steer	479 lbs	
PLjr 725	7'	25"	50 HP tractor loader, skid steer	560 lbs	
PLjr 825	8'	25"	60HP tractor loader, skid steer	639 lbs	

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

PRODUCT FEATURES :

- 18" hydraulic extension on each side
- Bolt-on removable 28" side panels
- Teflon cutting edge 1/2" x 6"
- Fixed side gates abrasion shoes
- Female 3 point hitch attachment
- This system requires 1 or 2 oil outlets.
(ask your representative)

OPTIONS (see page 17-18) :

- Non standard colour (NSC1)

3MAXXjr



Model	Blade position		Height	Application	Weight	Retail price
	Closed	Extended				
3Mjr 620-9	6'	9'	20"	Tractor only (light application)	332 lbs	

NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle


- Terms, conditions and general information (see page 18)

Note : The width of the blade does not determine the real dimension of the product. Pictures might show options.



Optional hydraulic kit

TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 17 of 18

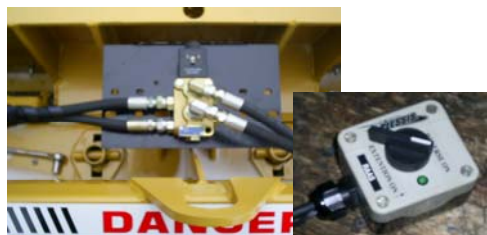

10gpm electric double valve deviation :

SAE8 "ports" entry dimension

Requires 12 volts power supply

Requires 1 oil outlet double action

2 electric oil outlets	(DVDE2)
3 electric oil outlets	(DVDE3)

16 gpm electric hydraulic valve distributor

Requires 1 oil outlet single action



JCS3	3 oil outlets
JCS4	4 oil outlets
JCS5	5 oil outlets
JCS6	6 oil outlets

* Hydraulic hoses

* only for Team Storm products


NON INCLUDED : Hoses and connectors from de blade to the motorized vehicle

Tractor mounting kit

Universal mount
"patent pending"


Tractor model 40HP - 80HP

MKS1

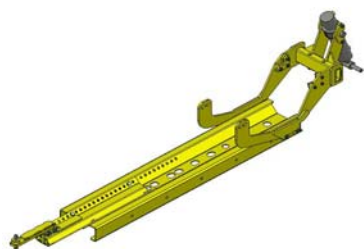


Tractor model 80HP - 150HP

MKS2



Tractor model 150HP - 250HP

MKS3

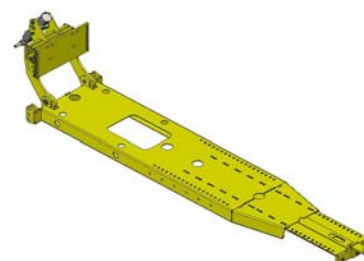



VC465

2009TURF & LANDSCAPE
TAB: SNOW REMOVAL
MAY 1/09
Page 18

Options

AAC	Nitrogen carboy (9.4 in3)	
A3P	3 point attachment (do not forget to deduct the mount page 17)	
CCE	Carboloy cutting edge 3/4" x 6"	Pied /
CEST1	Stainless cutting edge for model 6-10	
CEST2	Stainless cutting edge for model 7-12	
EXS	Extension straight	
EXSHD	Extension straight heavy duty	
FDE	Flow "divider" to make the extension go out and back in at the same time	
HAT1	Tractor mounts for model R2 5.5-8 and 6-10LT	
HAT2	Tractor mounts for model R2 6-10 and 7-12	
IQA	Industrial quick attach series BH, LD, MEBH, MELD, PLBH and PLLD	
MKS	Universal mount (see page 17)	
MKS5	Subframe for side wing "WingMaxx" 1360 lbs	
NSC1	Non standard colour	
OP+	Soft drive steel trip edge (PLUS option)	Pied /
OPT4	Hydraulic side wings	
RCE	Rubber cutting edge	Pied /
ROH	Lengthen hydraulic side wing of 10"	
SCE	Steel cutting edge 1/2" x 6"	Pied /
SCE3/4	Steel cutting edge 3/4" x 6"	Pied /
SLG	Sillage (requires an additional oil outlet for the tilt)(length of snow plow only)	Pied /
TCE3/4	Teflon cutting edge 3/4" x 6"	Pied /

Quick attach and hoses :

Two (2) hoses 1/2" with male coupler :

BCM5	5'
BCM30	30'

Agricultural quick attach :

JD quick attach :

QAJD1	Model 640-740
QAJD2	Model 540 (521 - 541)
QAA	ALO quick attach
QASS	New Holland & John Deere quick attach (Bob Cat/Skid Steer)
QAM	Manitou quick attach
QAH	Hardy quick attach
QA3P	3 point attachment
QABCI	Backhoe or industrial loader quick attach

Terms, conditions and general information

- Standard colour is Metal Plessis yellow.
- All **TEAMSTORM** products are guaranteed one year parts and labor. Please see Warranty policy.
- Plus applicable taxes and freight, FOB Plessisville Qc Canada.
- This price list cancels all previous lists. Prices are subject to change without notice.
- In the continuing quest for product improvement, Team Storm reserves the right to modify it without notice.
- All prices shown in your current country currency.



MADE IN CANADA