


Hydraulic timber trailer

Trailer dimensions	Width 1360mm x height 1500mm x length 3800mm
Loading area	Width 1250mm x height 750mm x length 2500mm x (ca 2.5m ³)
Total weight	600kg
Loading capacity	1500kg
Maximum reach of the crane	3.4m
Maximum weight lifting at 3.4m	200kg
Maximum weight lifting at 1.7m	350kg
Rotator	Baltrators GR10
Rotation radius	+/- 90°
Rotation radius of the rotator	infinite
Grapple area	0.08m ²
Maximum opening of grapple	750mm
Oil pressure	160bar
Tyres	Low pressure tyres 22 / 11 – 8"
Coupling	360 degrees rotatory coupling for 50mm hitch ball

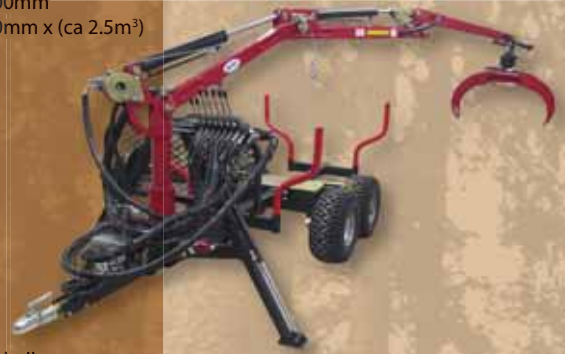

4x4 hydraulic drive system

Speed 3 – 5 km/h
Waterproof electric remote control

Std. on 350-II model

Hydraulic drive system helps the ATV move in hard conditions like deep snow, mud or stumps.



Hydraulic winch

Rated line pull 800kg
Speed 10 – 25m/min
Remote control area 30m

Std. on 350-II model

The winch helps to pull logs closer from inaccessible and dangerous areas.
Radio controlled hydraulic winch placed on the crane construction.



Hydraulic unit

7.5HP 4-stroke petrol engine
Oil tank 8 litres
Dimensions 350mm x 350mm x 700mm
Weight 30 kg

The hydraulic unit is fastened on the front rack of an ATV or on the back of an UTV or a pick-up truck.
Provides the necessary oil flow and pressure to operate the crane and all the accessories.



Additional information:

Galvanized and powder-coated steel construction.

2 pairs of log bolster posts in standard kit (possible to add extra log bolster posts for smaller timber).

Log bolster posts can be moved on the main frame to adjust the load balance of the trailer.

Suitable for transporting timber up to 5 metres of length.

Most of the hydraulic distribution moves through the frame of the trailer, making for good protection against damage.

Safe unloading of timber provided through hydraulic support legs.

Complete, illustrated user / operator & CE safety instructions included.

Product	Code	Price
Hydraulic timber trailer	350-II	\$10500



Eastern Farm Machinery Ltd. ☐
10 Nicholas Beaver Rd. ☐
Puslinch, ON., N0B 2J0 ☐
Tel. 5197632400, Fax 5197633930 ☐
sales@easternfarmmachinery.com

LOG BOLSTER POSTS KIT

Mounting additional posts allows transporting shorter logs.

Material	Galvanized and powder-coated steel construction
Dimensions	1300mm x 800mm
Weight	20kg

Product	Code	Price
Log bolster posts kit		



TIPPING BOX

Galvanized and powder-coated steel construction. The tipping box can be easily mounted on the trailer by removing the logging post on the trailer and lifting the dumper onto the trailer. Dumper dumps by 2 hydraulic cylinders.

Dimensions WxHxL	1400mm x 400mm x 2100mm
Capacity	1500kg
Tipping angle	46°
Weight	200kg

Product	Code	Price
Tipping box set	350-II only	\$1950.00



EARTH BUCKET

Designed to lift and dig soft soil.

Capacity	60 litres
Weight	60kg
Dimensions	420mm x 420mm x 560mm

Product	Code	Price
Earth bucket set		\$565.00

